


Technical Information for Gen-X Heat Reflecting Insulation

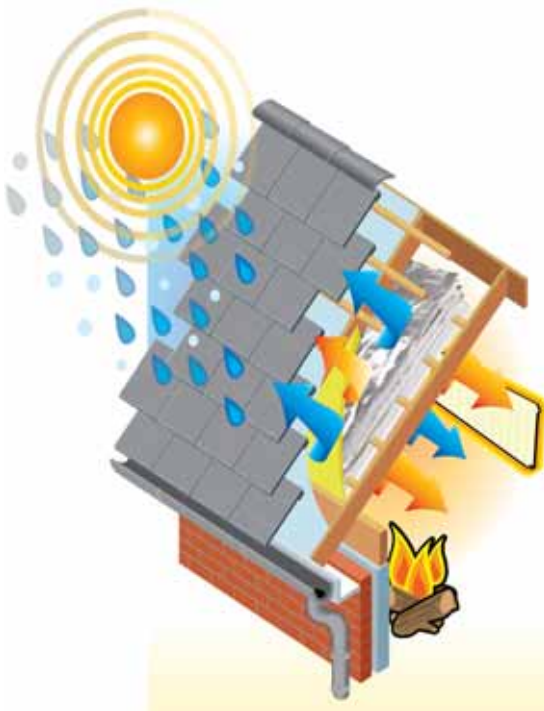

Gen-X® helps seal your roof against climatic elements such as wind and damp whilst at the same time retaining ventilation. Using reflective technology, **Gen-X®** helps prevent your roof space from overheating in summer by reflecting the electromagnetic radiation from the sun whilst retaining warmth in winter. **Gen-X®** is ideal for applications requiring a dual layer of insulation.


Gen-X Heat Reflecting Insulation from nbs

Gen-X roll size	33mm thick x 1.2m wide x 12.5m = 15m ² per roll.
Insulating layers	Seven within the 33mm thickness.
Weight per roll	13kg.
R - value	1.9m ² kW
Resistance to tearing	300 to 450N (Nail shank) BS EN 21310-1
Flammability	Class E to BS EN ISO 11925-2




Typical Applications with a U-Value of 0.20W/m²K (Based on 600mm centres)


Below Rafter Installation & PUR

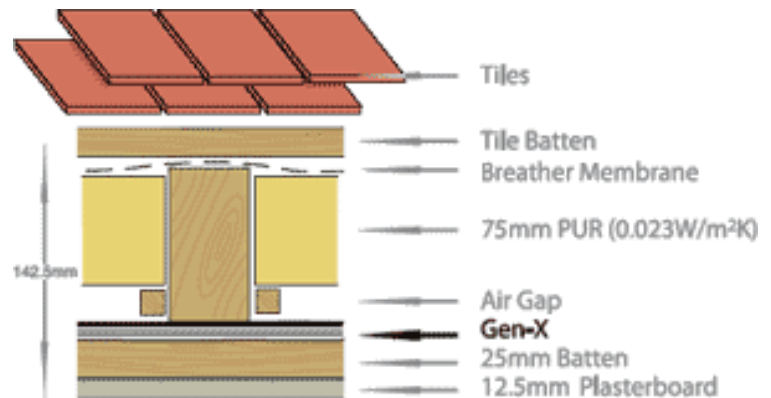


Above Rafter Installation & PUR

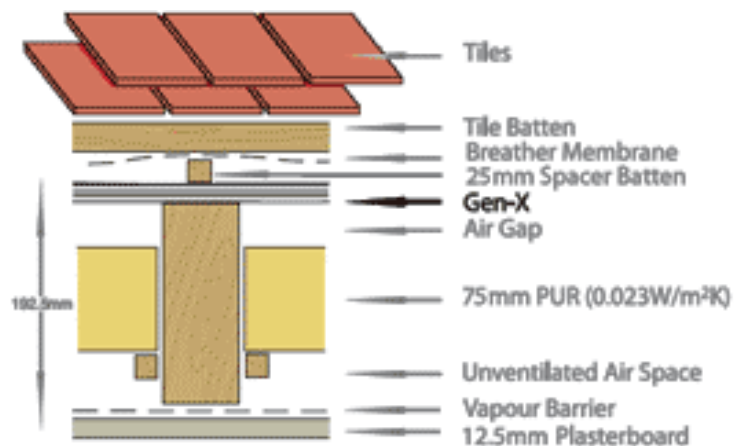

Below Rafter Installation & Glass Wool

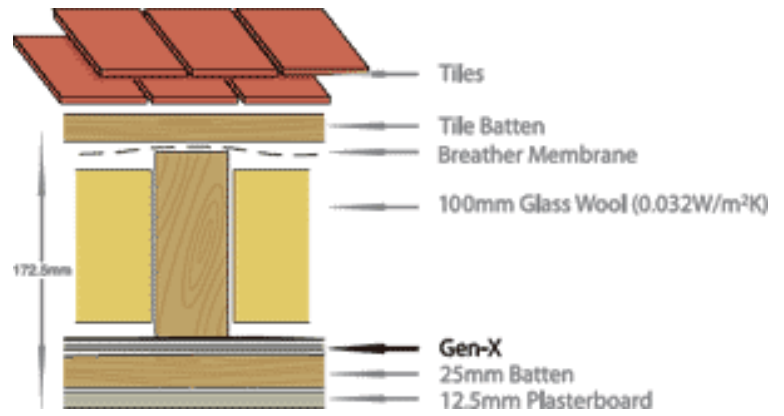

Above Rafter Installation & Glass Wool

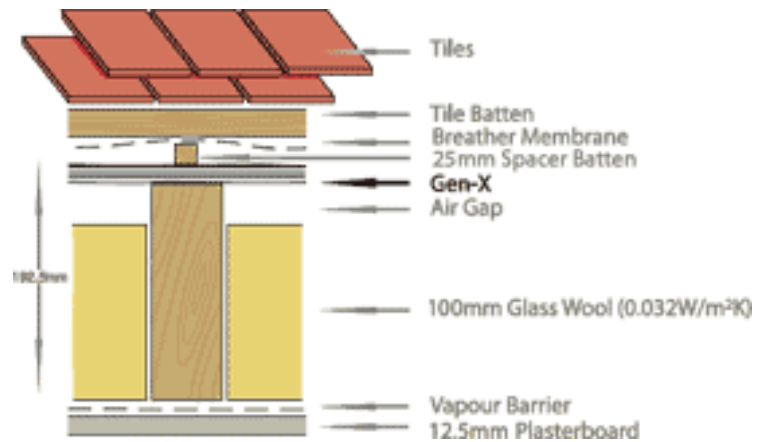

Nbs2 GEN-X 11.03.2010

The texts, photographs and illustrations used in this publication have been reproduced with kind permission of Euroform Products Limited.

This publication is issued subject to alteration or withdrawal without notice. The illustrations and specifications are not binding in detail. All offers are subject to the Company's current terms and conditions of sale, a copy of which is available on request.

Gen-X insulation is conveniently available from:

nationwide
build
shop limited www.nbs-home.co.uk