


Multivap

BREATHABLE ROOF TILE UNDERLAY FOR USE IN COLD NON-VENTED ROOFS



Purchase this product from www.nbs-home.co.uk

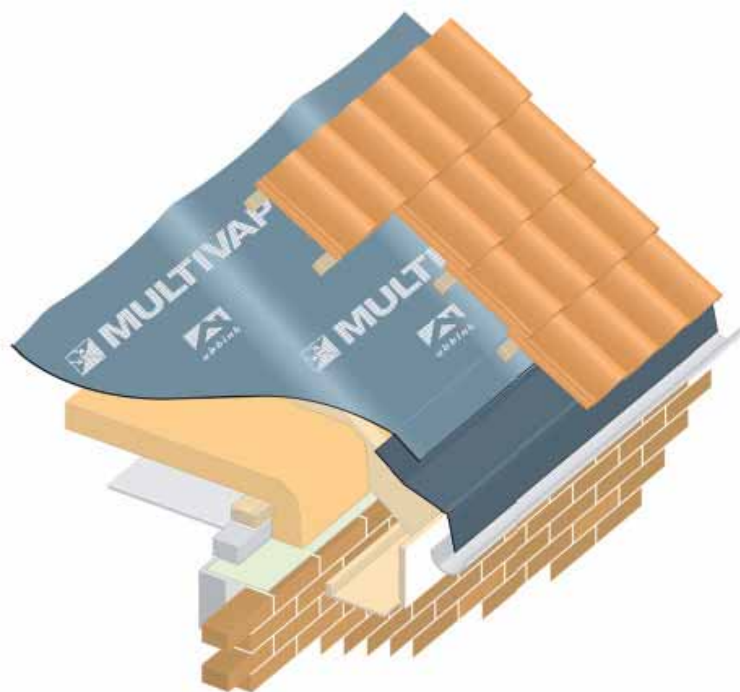

Multivap Breathable Roof Tile Underlay is a composite structure, manufactured via lamination of a water vapour permeable film between two layers of non-woven polypropylene, spun bond to form a flexible, vapour permeable, roof tile or slate underlay for unsupported and fully supported specifications.

Roofs should be constructed in accordance with the relevant Clauses of BS 5534:2003.4

The product will resist the passage of water, wind-blown snow and dust into the interior of a building, under all conditions to be found in a roof constructed in accordance with the relevant Clauses of BS 5534:2003.

Multivap resists penetration of liquid water and consequently may be used as temporary waterproofing prior to the installation of slates or tiles. The period of such use should, however, be kept to a minimum.

Multivap – Breathable roof tile underlay 1m x 45m rolls offered by nbs

Type	Breathability grams per m ² /24hrs	HOW* m	Thickness mm	Weight g/m ²	Weight per roll kg	Colour*** Upper surface	BBA Certificate Number
250	1960	5.27	0.6	90	4.05	Mid Grey	09/4706
300	1388	3.00	0.5	125	5.63	Mid Grey	03/4064

Multivap – Breathable roof tile underlay 1.5m x 50m rolls offered by nbs

250	1960	5.27	0.6	90	6.75	Mid Grey	09/4706
300	1388	3.00	0.5	125	9.38	Mid Grey	03/4064
400HD**	1388	5.89	0.6	165	12.38	Light Grey	06/4337

* HOW = Head Of Water **HD = Heavy Duty *** The lower unprinted surface is White.



See table above for BBA Certificate numbers

nationwide
build
shop

A digital copy of the BBA Certificate for Multivap Breathable Roof Underlay is available upon request sales@nbs-home.co.uk

This publication is issued subject to alteration or withdrawal without notice. The illustrations and specifications are not binding in detail. All offers are subject to the Company's current terms and conditions of sale, a copy of which is available on request.