



# THERMAFLEECE®

SHEEPSWOL THERMAL AND ACOUSTIC INSULATION

## Installation Guidelines



ThermaFleece insulation batts are ideal for use in both new-build and refurbishment projects. The product is environmentally friendly and safe to handle and can be used for insulating warm roof applications, within walls and floors. The sizes offered allow many combinations of thicknesses and widths to be selected.

The ThermaFleece insulation will be delivered direct to your home. Any excess insulation can be used to insulate the hot or cold water tank or simply added on top of the thickness installed.

### ThermaFleece insulation batts from nbs


Please note, batts in the quantities shown below are supplied as palletised packs

ThermaFleece Batt thickness & width mm	1x batt area m <sup>2</sup>	Number of batts per pack	Area of batts per pack m <sup>2</sup>	Order Code
50 x 400	0.48	42	20.16	PN50400
50 x 600	0.72	28	20.16	PN50600
75 x 400	0.48	27	12.96	PN75400
75 x 600	0.72	18	12.96	PN75600
100 x 400	0.48	21	10.08	PN100400
100 x 600	0.72	14	10.08	PN100600

All ThermaFleece batts are 1200mm long




### Typical warm roof installation between rafters

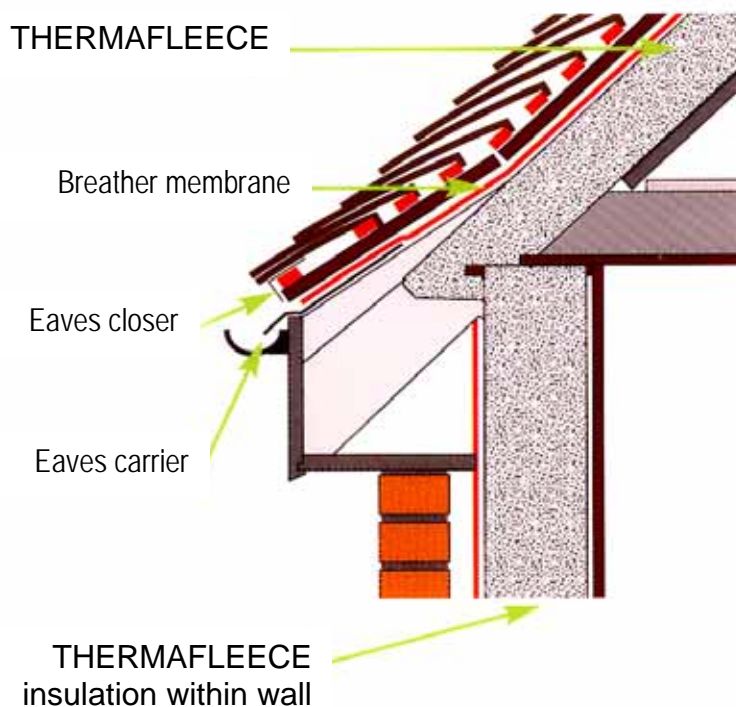


Continued – Typical walls and floors next page

**Typical wall applications**


Traditional brick outer skin

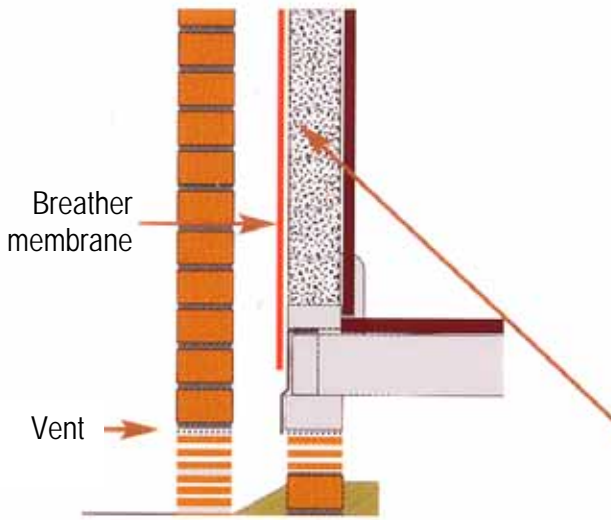

Hung tiles

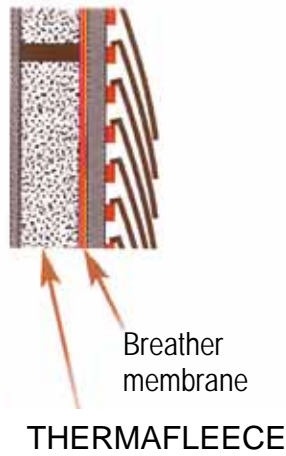


Shiplap weather boarding

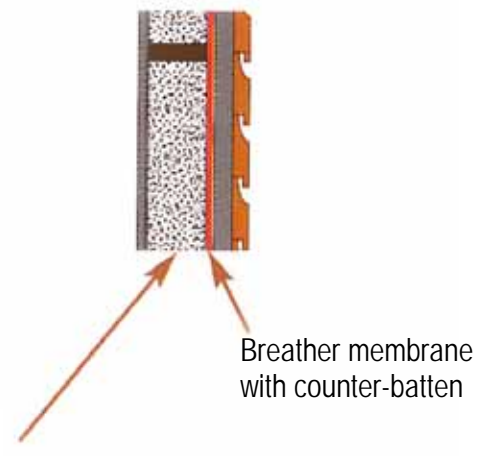


**Typical floor applications**

Suspended timber ground floor

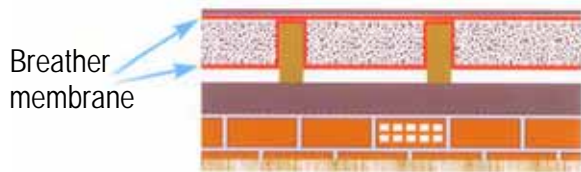

Intermediate timber floor

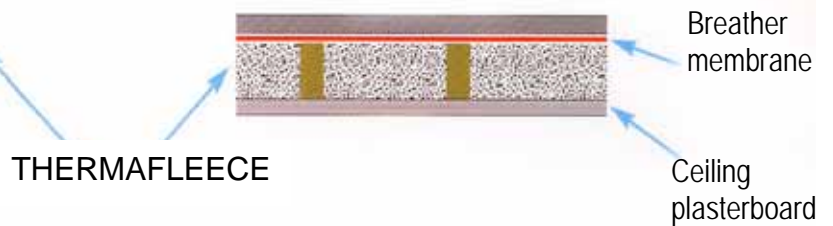

nbs3 THERMAFLEECE 30.03.11  
The texts, photographs and illustrations used in this publication have been reproduced with kind permission of Second Nature UK Limited.

This publication is issued subject to alteration or withdrawal without notice. The illustrations and specifications are not binding in detail. All offers are subject to the Company's current terms and conditions of sale, a copy of which is available on request.

ThermaFleece insulation products conveniently available from:

