


Surface water drainage channel installation

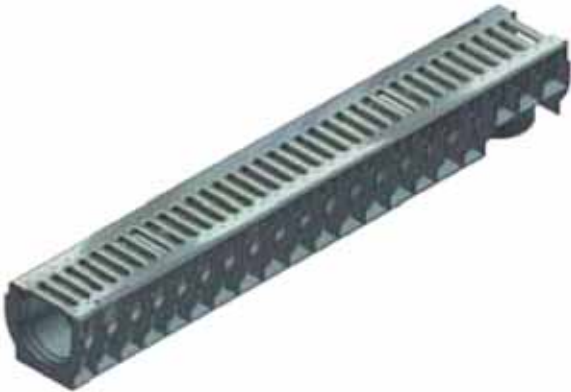


RECYFIX® 100 Surface Water Drainage Channel

An optional accessory - two end caps, each incorporating a 70mm universal outlet.
Article No. 40281

RECYFIX® 100 Drainage Channel				
Length per piece mm*	Width mm	Height mm	Weight kg	Article No
1000	160	135	4.4	40231
Concrete* foundation sizes – refer drawing below				
Dimension b mm	Dimension d mm	Dimension h** mm		
80 to 100	80 to 100	218 to 240		
* Concrete foundation recommended quality B25				
** Overall height of concrete foundation (h mm)				
Nominal thicknesses of other materials				
Pavement blocks of slabs = 60mm				
Macadam = 60mm				
Compacted sharp sand = 20mm (Pavement blocks of slabs)				
Compacted M.O.T Type 1 GSP (Upper) = 50mm (Pavement blocks of slabs)				
Compacted M.O.T Type 1 GSP (Upper) = 70mm (Macadam)				
Compacted M.O.T Type 1 GSP or hardcore (Lower) = 100mm below concrete foundation.				

Installation example of RECYFIX® 100 drainage channel

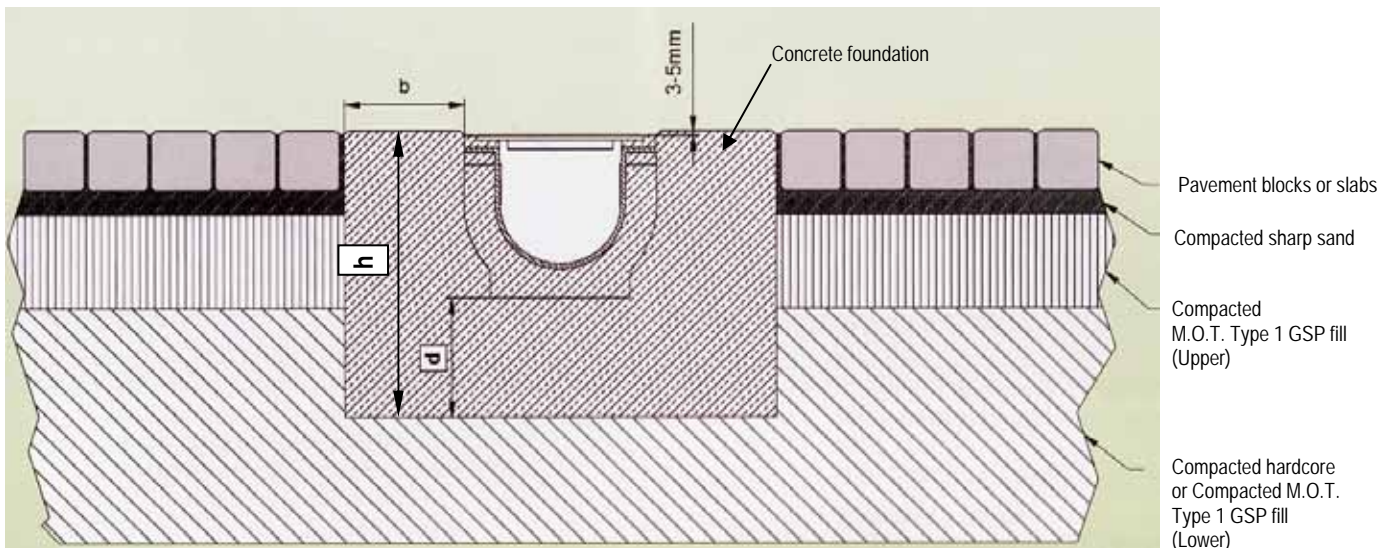

nbs3 HAURATON RECYFIX 100 08.03.11

The texts, photographs and illustrations used in this publication have been reproduced with kind permission of Hauraton Limited

nationwide
build
shop

This publication is issued subject to alteration or withdrawal without notice. The illustrations and specifications are not binding in detail. All offers are subject to the Company's current terms and conditions of sale, a copy of which is available on request.